



MAHAVIR SURGICAL

Designing & Defining Healthcare Products



"LED OT LIGHT & OT TABLE" WITH AN UPDATE



MAHAVIR SURGICAL

LED Series - Special Features :

Great Behave of Laminar Flow

operation room

Our LED light have special European design for ventilation of heat.



Changing the Light Colour

You have the possibility to choose the optimum OR light as preferred or according to the tissue type and the wound field texture. This function can facilitate the clear distinction between various types of tissue and the perception of true tissue colors. Additionally, adjustable color selection can help with concentration of errors due to fatigue.



Safety Glass for Lens Protection

We offer LED lights with protective fire resistant ESG safety glass cover for scratch proof, fast disinfection process and improve the light penetration. It is made of monolayer safety glass which protects the lens from ultra-violet and infrared rays.



Sterilizable handle:

We provide high quality Sterilizable Handle.


Life of Bulb more than 45000 Hrs.

The LED Series offer an incredible long life of the bulbs more than 45000 hours.






For our Hex Model we provide double side touch screen control panel. It also has memory preset options

For our normal LED Series we can adjust the intensity and colour temperature of light.

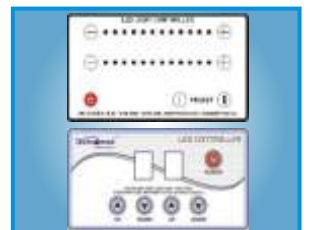

Inter changeable connector pods

For our hexagonal model we are providing wireless connectors for connections. Each pod can be easily removed or added by the surgeons and they are interchangeable. The main positive feature here is that the surgeon can replace the pods without help of engineers.

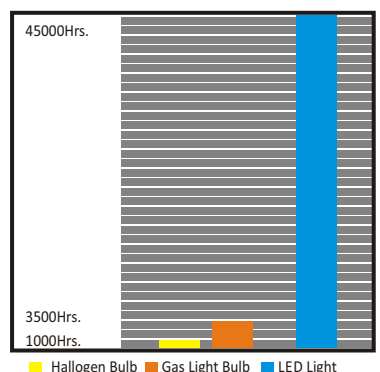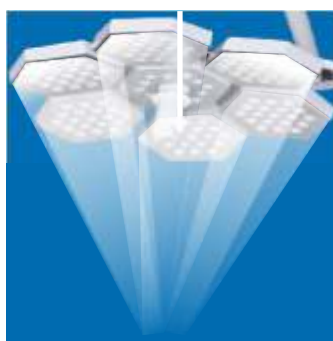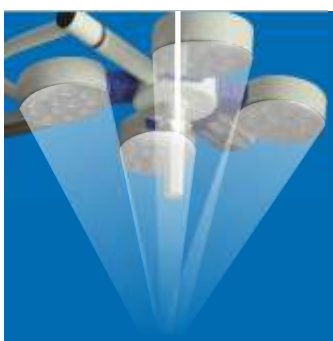

■ Halogen Bulb ■ Gas Light Bulb ■ LED Light



MAHAVIR SURGICAL

Launches easily detachable connector based LED OT Light which can be operated even by the surgeons



HEX-126

Intensity	170000 Lux \pm 10%
Size of light field	12-30 cm
Colour Temperature	4000 - 5000 K
Colour Reduction Index	93 Ra
Led Life	>45000 Hrs
Number of LEDs	124 (Multiple Colour)
Diameter of Light	500 mm
Brightness Control	Double sided touch screen control panel
Power Supply	220v/50Hz AC
Focusing	Fixed
Optional	Camera, Monitor & Battery Backup

TECHNICAL FEATURES

Special Features : Memory Function, High quality sterilizable handle, With protective fire resistant ESG safety glass for scratch proof, fast disinfection process, protects UV and IR rays and improve light penetration. With special European design for ventilation of heat. Body is made of high quality fire resistant polymer. Dual controller with touch screen. Wireless and connector based connections which helps even the surgeon to detach the pods of the light. Interchangeable LED pods for easy replacement and no downtime. With memory preset options.



Side View



Back View




Connector based easily detachable Pod



*Designing &
Defining Healthcare
Products*



MAHAVIR SURGICAL

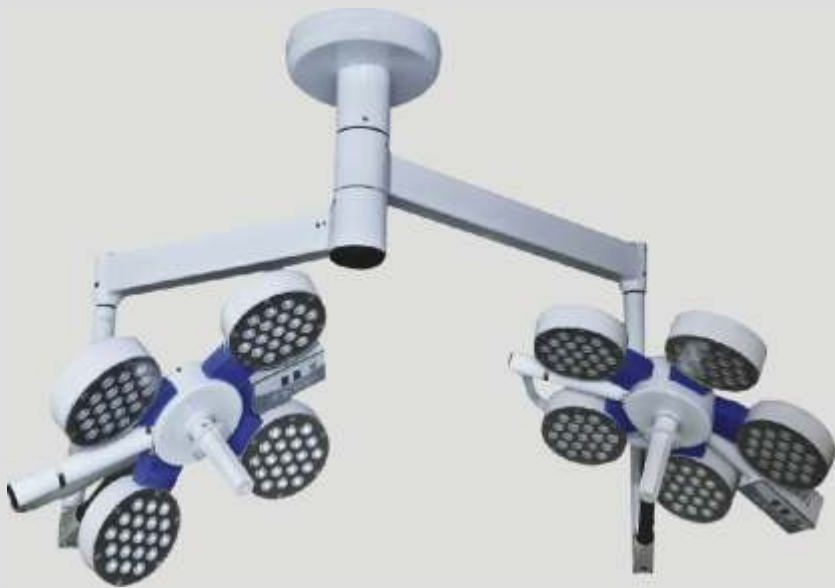

LED-CT-5+4 (Adjustable Colour Temperature)

Technical Data

Intensity	1,20,000 Lux \pm 10%
	1,40,000 Lux \pm 10%
Size of light field	12 - 30 cm
Colour Temp.	4000-5000 K
Colour Reduction Index	93 RA
LED Life	>45000 Hrs.
Number of LED	19 x 4 + 19 x 5
Diameter of Light	500mm x 2
Brightness Control	Digital 9 Steps
Power Supply	220V/50Hz AC
Focusing	Adjustable
Battery Backup	Optional

Special Features : Memory Function, High quality sterilizable handle, With protective fire resistant ESG safety glass for scratch proof, fast disinfection process, protects UV and IR rays and improve light penetration. With special European design for ventilation of heat. Body is made of high quality fire resistant polymer.



LED-CT-5+3 (Adjustable Colour Temperature)

Technical Data

Intensity	80,000 Lux \pm 10%
	1,40,000 Lux \pm 10%
Size of light field	12 - 30 cm
Colour Temp.	4000-5000 K
Colour Reduction Index	93 RA
LED Life	>45000 Hrs.
Number of LED	19 x 3 + 19 x 5
Diameter of Light	500mm x 2
Brightness Control	Digital 9 Steps
Power Supply	220V/50Hz AC
Focusing	Adjustable
Battery Backup	Optional

Special Features : Memory Function, High quality sterilizable handle, With protective fire resistant ESG safety glass for scratch proof, fast disinfection process, protects UV and IR rays and improve light penetration. With special European design for ventilation of heat. Body is made of high quality fire resistant polymer.



*Designing &
Defining Healthcare
Products*



MAHAVIR SURGICAL



LED-CT-4+4 (Adjustable Colour Temperature)

Technical Data

Intensity	1,20,000 Lux \pm 10%
	1,20,000 Lux \pm 10%
Size of light field	12 - 30 cm
Colour Temp.	4000-5000 K
Colour Reduction Index	93 RA
LED Life	>45000 Hrs.
Number of LED	19 x 4 + 19 x 4
Diameter of Light	500mm x 2
Brightness Control	Digital 9 Steps
Power Supply	220V/50Hz AC
Focusing	Adjustable
Battery Backup	Optional

Special Features : Memory Function, High quality sterilizable handle, With protective fire resistant ESG safety glass for scratch proof, fast disinfection process, protects UV and IR rays and improve light penetration. With special European design for ventilation of heat. Body is made of high quality fire resistant polymer.



LED-CT-4+3 (Adjustable Colour Temperature)

Technical Data

Intensity	80,000 Lux \pm 10%
	1,20,000 Lux \pm 10%
Size of light field	12 - 30 cm
Colour Temp.	4000-5000 K
Colour Reduction Index	93 RA
LED Life	>45000 Hrs.
Number of LED	19 x 3 + 19 x 4
Diameter of Light	500mm x 2
Brightness Control	Digital 9 Steps
Power Supply	220V/50Hz AC
Focusing	Adjustable
Battery Backup	Optional

Special Features : Memory Function, High quality sterilizable handle, With protective fire resistant ESG safety glass for scratch proof, fast disinfection process, protects UV and IR rays and improve light penetration. With special European design for ventilation of heat. Body is made of high quality fire resistant polymer.



*Designing &
Defining Healthcare
Products*



MAHAVIR SURGICAL



LED-CT-3+3 (Adjustable Colour Temperature)

Technical Data

Intensity	80,000 Lux \pm 10%
	80,000 Lux \pm 10%
Size of light field	12 - 30 cm
Colour Temp.	4000-5000 K
Colour Reduction Index	93 RA
LED Life	>45000 Hrs.
Number of LED	19 x 3 + 19 x 3
Diameter of Light	500mm x 2
Brightness Control	Digital 9 Steps
Power Supply	220V/50Hz AC
Focusing	Adjustable
Battery Backup	Optional


Special Features : Memory Function, High quality sterilizable handle, With protective fire resistant ESG safety glass for scratch proof, fast disinfection process, protects UV and IR rays and improve light penetration. With special European design for ventilation of heat. Body is made of high quality fire resistant polymer.



LED-CT-5
(Adjustable Colour Temperature)



Mobile Model

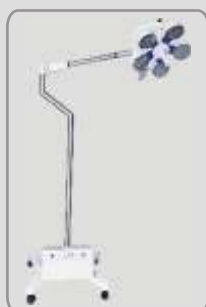

Mobile Model
(with battery backup)

Technical Data

Intensity	1,40,000 Lux \pm 10%
Size of light field	12 - 30 cm
Colour Temp.	4000-5000 K
Colour Reduction Index	93 RA
LED Life	>45000 Hrs.
Number of LED	19 x 5
Diameter of Light	500mm
Brightness Control	Digital 9 Steps
Power Supply	220V/50Hz AC
Focusing	Adjustable
Battery Backup	Optional

Special Features : Memory Function, High quality sterilizable handle, With protective fire resistant ESG safety glass for scratch proof, fast disinfection process, protects UV and IR rays and improve light penetration. With special European design for ventilation of heat. Body is made of high quality fire resistant polymer.



*Designing &
Defining Healthcare
Products*



MAHAVIR SURGICAL



LED-CT-4

(Adjustable Colour Temperature)



Mobile Model



Mobile Model
(with battery backup)

Technical Data

Intensity	1,20,000 Lux \pm 10%
Size of light field	12 - 30 cm
Colour Temp.	4000-5000 K
Colour Reduction Index	93 RA
LED Life	>45000 Hrs.
Number of LED	19 x 4
Diameter of Light	500mm
Brightness Control	Digital 9 Steps
Power Supply	220V/50Hz AC
Focusing	Adjustable
Battery Backup	Optional

Special Features : Memory Function, High quality sterilizable handle, With protective fire resistant ESG safety glass for scratch proof, fast disinfection process, protects UV and IR rays and improve light penetration. With special European design for ventilation of heat. Body is made of high quality fire resistant polymer.



LED-CT-3

(Adjustable Colour Temperature)



Mobile Model



Mobile Model
(with battery backup)

Technical Data

Intensity	80,000 Lux \pm 10%
Size of light field	12 - 30 cm
Colour Temp.	4000-5000 K
Colour Reduction Index	93 RA
LED Life	>45000 Hrs.
Number of LED	19 x 3
Diameter of Light	500mm
Brightness Control	Digital 9 Steps
Power Supply	220V/50Hz AC
Focusing	Adjustable
Battery Backup	Optional

Special Features : Memory Function, High quality sterilizable handle, With protective fire resistant ESG safety glass for scratch proof, fast disinfection process, protects UV and IR rays and improve light penetration. With special European design for ventilation of heat. Body is made of high quality fire resistant polymer.



*Designing &
Defining Healthcare
Products*



MAHAVIR SURGICAL



LED-C-3+3 (Fixed Colour Temperature)

Technical Data

Intensity	80,000 Lux \pm 10%
	80,000 Lux \pm 10%
Size of light field	12 - 30 cm
Colour Temp.	4000-5000 K
Colour Reduction Index	93 RA
LED Life	>45000 Hrs.
Number of LED	12 x 3 + 12 x 3
Diameter of Light	500mm x 2
Brightness Control	Digital 10 Steps
Power Supply	220V/50Hz AC
Focusing	Adjustable
Battery Backup	Optional

Special Features : Memory Function, High quality sterilizable handle, With protective fire resistant ESG safety glass for scratch proof, fast disinfection process, protects UV and IR rays and improve light penetration. With special European design for ventilation of heat. Body is made of high quality fire resistant polymer.



LED-C-5
(Fixed Colour Temperature)



Mobile Model



Mobile Model
(with battery backup)

Technical Data

Intensity	1,40,000 Lux \pm 10%
Size of light field	12 - 30 cm
Colour Temp.	4000-5000 K
Colour Reduction Index	93 RA
LED Life	>45000 Hrs.
Number of LED	12 x 5
Diameter of Light	500mm
Brightness Control	Digital 10 Steps
Power Supply	220V/50Hz AC
Focusing	Adjustable
Battery Backup	Optional

Special Features : Memory Function, High quality sterilizable handle, With protective fire resistant ESG safety glass for scratch proof, fast disinfection process, protects UV and IR rays and improve light penetration. With special European design for ventilation of heat. Body is made of high quality fire resistant polymer.



*Designing &
Defining Healthcare
Products*



MAHAVIR SURGICAL



LED-C-4 (Fixed Colour Temperature)



Mobile Model



Mobile Model
(with battery backup)

Technical Data

Intensity	1,20,000 Lux \pm 10%
Size of light field	12 - 30 cm
Colour Temp.	4000-5000 K
Colour Reduction Index	93 RA
LED Life	>45000 Hrs.
Number of LED	12 x 4
Diameter of Light	500mm
Brightness Control	Digital 10 Steps
Power Supply	220V/50Hz AC
Focusing	Adjustable
Battery Backup	Optional

Special Features : Memory Function, High quality sterilizable handle, With protective fire resistant ESG safety glass for scratch proof, fast disinfection process, protects UV and IR rays and improve light penetration. With special European design for ventilation of heat. Body is made of high quality fire resistant polymer.



LED-C-3 (Fixed Colour Temperature)



Mobile Model



Mobile Model
(with battery backup)

Technical Data

Intensity	80,000 Lux \pm 10%
Size of light field	12 - 30 cm
Colour Temp.	4000-5000 K
Colour Reduction Index	93 RA
LED Life	>45000 Hrs.
Number of LED	12 x 3
Diameter of Light	500mm
Brightness Control	Digital 10 Steps
Power Supply	220V/50Hz AC
Focusing	Adjustable
Battery Backup	Optional

Special Features : Memory Function, High quality sterilizable handle, With protective fire resistant ESG safety glass for scratch proof, fast disinfection process, protects UV and IR rays and improve light penetration. With special European design for ventilation of heat. Body is made of high quality fire resistant polymer.



*Designing &
Defining Healthcare
Products*



MAHAVIR SURGICAL



MS-LED-EL

Technical Data

Intensity	35,000 Lux \pm 10%
Size of light field	12 - 30 cm
Colour Temp.	4000-5000 K
Colour Reduction Index	93 RA
LED Life	>45000 Hrs.
Number of LED	12
Diameter of Light	150mm
Brightness Control	Digital
Power Supply	220V/50Hz AC
Focusing	Adjustable
Battery Backup	Optional

Special Features : Memory Function, With protective fire resistant ESG safety glass for scratch proof, fast disinfection process, protects UV and IR rays and improve light penetration. With special European design for ventilation of heat. Body is made of high quality fire resistant polymer.



*Designing &
Defining Healthcare
Products*



MAHAVIR SURGICAL

SHADOWLESS HALOGEN OPERATING LIGHT

CEILING SUSPENDED LIGHTS



MS-1101



MS-1102



MS-1103



MS-1104



*Designing &
Defining Healthcare
Products*



MAHAVIR SURGICAL

SHADOWLESS HALOGEN OPERATING LIGHT

PEDESTAL OPERATING LIGHTS



MS-1105



MS-1106



MS-1107



MS-1108



*Designing &
Defining Healthcare
Products*



MAHAVIR SURGICAL

SHADOWLESS HALOGEN OPERATING LIGHT

MODEL	DOME	REFLECTORS	INTENSITY (LUX)	BULB	COLOUR TEMP.	STANDBY BULB
MS-1101D	28" FIBER	DICH. GLASS	1,15,000	24V/70W	4300 K	N.A.
MS-1101A	28" FIBER	ALUMINIUM	70,000	24V/70W	3300 K	N.A.
MS-1102D	20" FIBER	DICH. GLASS	1,00,000	24V/150W	4300 K	YES
MS-1102A	20" FIBER	ALUMINIUM	55,000	24V/150W	3300 K	YES
MS-1103D	20" FIBER	DICH. GLASS	75,000	24V/70W	4300 K	N.A.
MS-1103A	20" FIBER	ALUMINIUM	45,000	24V/70W	3300 K	N.A.
MS-1104	19" ALUM	ALUMINIUM	50,000	24V/150W	3300 K	YES
MS-1105D	20" FIBER	DICH. GLASS	1,00,000	24V/150W	4300 K	YES
MS-1105A	20" FIBER	ALUMINIUM	55,000	24V/150W	3300 K	YES
MS-1106D	20" FIBER	DICH. GLASS	75,000	24V/70W	4300 K	N.A.
MS-1106A	20" FIBER	ALUMINIUM	45,000	24V/70W	3300 K	N.A.
MS-1107	19" ALUM	ALUMINIUM	50,000	24V/150W	3300 K	YES
MS-1108A	14" ALUM	ALUMINIUM	25,000	24V/100W	3300 K	N.A.



*Designing &
Defining Healthcare
Products*



Electric Gynecological obstetric operating table



MS-1208

Technical Data

Length of Table	1600 mm
Width of Table Top	550 mm
Minimum Height (without Mattress)	Min. 750 mm
Maximum Height (without Mattress)	Max. 1000 mm
Lateral Tilt	$\pm 20^\circ$
Back Section	$\pm 80^\circ$
Leg Section	$0^\circ - 90^\circ$
Floor Locking System	Manual

Obstetrics operating room table perfect for all kinds of gynecological operations.

The cover for base and column is made of 304 stainless steel, good performance on anti-rust and easy to clean.

Features:

- 1) Functional and versatile
- 2) Flexibility and precision
- 3) Hygienic design
- 4) Easy cleaning
- 5) User-friendly



*Designing &
Defining Healthcare
Products*



Semi-Electric General Surgical Operating Table



MS-1204 EL

Technical Data

Length of Table	1900 mm
Width of Table Top	520 mm
Minimum Height (without Mattress)	Min. 750 mm
Maximum Height (without Mattress)	Max. 1000 mm
Trendelenburg	25°
Reverse Trendelenburg	25°
Lateral Tilt	±20°
Back Section	±60°
Head Section	±60°
Leg Section	0°-90°
Floor Locking System	Manual

Salient Features :

- Electric up & down by Cable remote (Made in Taiwan)
- Five section stainless steel top gives anatomic adaptation to the patient body.
- Built-in Kidney Bridge and large perineal cut-out for drainage.
- All the operating positions including Proctology, Lithotomy, Chair, Flex, Reflex, Trendelenburg and Reverse Trendelenburg, Lateral Tilt etc. can be obtained from either side of the table by working of different handles.



*Designing &
Defining Healthcare
Products*



ELECTRIC SURGICAL OPERATING TABLE



MS-1202

Technical Data

Length of Table	1900 mm
Width of Table Top	520 mm
Minimum Height (without Mattress)	Min. 750 mm
Maximum Height (without Mattress)	Max. 1000 mm
Trendelenburg	25°
Reverse Trendelenburg	25°
Lateral Tilt	±20°
Back Section	±60°
Head Section	±60°
Leg Section	0°-90°
Floor Locking System	Manual

Salient Features :

- Eccentric Pillars
- Stainless Fitting
- Detachable, head, leg & Pelvic section
- In built kidney bridge
- Five Sectional Radio - Translucent Top.
- Base & Cover made of attractive, easy to clean Stainless Steel.
- Sophisticated mechanics provide smooth, step less articulation of the table Top for precise patient positioning.



*Designing &
Defining Healthcare
Products*



C-arm Compatible Hydraulic Operating Table



MS-1203

Technical Data

Length of Table	1900 mm
Width of Table Top	520 mm
Minimum Height (without Mattress)	Min. 750 mm
Maximum Height (without Mattress)	Max. 1000 mm
Trendelenburg	25°
Reverse Trendelenburg	25°
Lateral Tilt	±20°
Back Section	±60°
Head Section	±60°
Leg Section	0°-90°
Floor Locking System	Manual

Salient Features :

- Eccentric Pillars
- Stainless Fitting
- Detachable, head, leg & Pelvic section
- In built kidney bridge
- Five Sectional Radio - Translucent.
- Base & Cover made of attractive, easy to clean Stainless Steel.
- Sophisticated mechanics provide smooth, step less articulation of the table Top for precise patient positioning.



*Designing &
Defining Healthcare
Products*



C-arm Compatible Semi-Electric Operating Table



MS-1203 EL

Technical Data

Length of Table	1900 mm
Width of Table Top	520 mm
Minimum Height (without Mattress)	Min. 750 mm
Maximum Height (without Mattress)	Max. 1000 mm
Trendelenburg	25°
Reverse Trendelenburg	25°
Lateral Tilt	±20°
Back Section	±60°
Head Section	±60°
Leg Section	0°-90°
Floor Locking System	Manual

Salient Features :

- Electric up & down by cable remote (made in Taiwan)
- Eccentric Pillars
- Stainless Fitting
- Detachable, head, leg & Pelvic section
- In built kidney bridge
- Five Sectional Radio - Translucent.
- Base & Cover made of attractive, easy to clean Stainless Steel.
- Sophisticated mechanics provide smooth, step less articulation of the table Top for precise patient positioning.



*Designing &
Defining Healthcare
Products*



Hydraulic Surgical Operating Table



MS-1204

Technical Data

Length of Table	1900 mm
Width of Table Top	520 mm
Minimum Height (without Mattress)	Min. 750 mm
Maximum Height (without Mattress)	Max. 1000 mm
Trendelenburg	25°
Reverse Trendelenburg	25°
Lateral Tilt	±20°
Back Section	±60°
Head Section	±60°
Leg Section	0°-90°
Floor Locking System	Manual

Salient Features :

- Precision made Hydraulic System with a single lever action Hydraulic Lift controlled by a foot Pedal.
- Five section stainless steel top gives anatomic adaptation to the patient body.
- Built-in Kidney Bridge and large perineal cut-out for drainage.
- All the operating positions including Proctology, Lithotomy, Chair, Flex, Reflex, Trendelenburg and Reverse Trendelenburg, Lateral Tilt etc. can be obtained from either side of the table by working of different handles.



*Designing &
Defining Healthcare
Products*



Semi-Electric General Surgical Operating Table



MS-1204 EL

Technical Data

Length of Table	1900 mm
Width of Table Top	520 mm
Minimum Height (without Mattress)	Min. 750 mm
Maximum Height (without Mattress)	Max. 1000 mm
Trendelenburg	25°
Reverse Trendelenburg	25°
Lateral Tilt	±20°
Back Section	±60°
Head Section	±60°
Leg Section	0°-90°
Floor Locking System	Manual

Salient Features :

- Electric up & down by Cable remote (Made in Taiwan)
- Five section stainless steel top gives anatomic adaptation to the patient body.
- Built-in Kidney Bridge and large perineal cut-out for drainage.
- All the operating positions including Proctology, Lithotomy, Chair, Flex, Reflex, Trendelenburg and Reverse Trendelenburg, Lateral Tilt etc. can be obtained from either side of the table by working of different handles.



*Designing &
Defining Healthcare
Products*



Sliding Top Operating Table



MS-1205

This Electromatic sliding top O.T Table is suitable for all kind of surgeries, i.e. general surgery, vascular surgery, cardio, neurology, urology, gynecology, proctology, laparoscopy, traumatic surgery, plastic surgery and others. The base & column of the table is made of high quality medical stainless steel (Grade - 304). Non- reflecting surface, antibacterial & easy to clean. We provide with a top sliding of 5inch back/forward. Height adjustment, Lateral Tilts, Trendelenburg, and Flex - Reflex, Chair Position and Longitudinal Sliding top are realized by Remote control.

Technical Data

Length of Table	1900 mm
Width of Table Top	520 mm
Minimum Height (without Mattress)	Min. 750 mm
Maximum Height (without Mattress)	Max. 1000 mm
Trendelenburg	25°
Reverse Trendelenburg	25°
Lateral Tilt	±20°
Back Section	±20°
Head Section	±60°
Leg Section	0°-90°
Top Sliding	5" Reverse & 5" Forward

Salient Features :

- Eccentric Pillars
- Stainless Fitting
- Detachable, head, leg & Pelvic section
- Four Sectional Radio - Translucent Top.
- Base & Cover made of attractive, easy to clean Stainless Steel.
- Sophisticated mechanics provide smooth, step less articulation of the table Top for precise patient positioning.
- Battery Back-up Available



*Designing &
Defining Healthcare
Products*



Ophthalmic Operating Table



MS-1206

This Ophthalmic Table is specially designed for ophthalmic surgery. Three sectional table is provided with drainage system in the head section. The table has sturdy base, column made up of stainless steel, antibacterial and is easy to clean. Electromotive height and trendelenburg positions with the help of lightweight handheld control unit.

Technical Data

Length of Table	1900 mm
Width of Table Top	520 mm
Minimum Height (without Mattress)	Min. 750 mm
Maximum Height (without Mattress)	Max. 1000 mm
Trendelenburg	25°
Reverse Trendelenburg	25°
Leg Section	0°-90°

Salient Features :

- Eccentric Pillars
- Stainless Fitting
- Detachable, head & leg section
- Three Sectional Radio - Translucent Top.
- Base & Cover made of attractive, easy to clean Stainless Steel.
- Sophisticated mechanics provide smooth, step less articulation of the table Top for precise patient positioning.



*Designing &
Defining Healthcare
Products*



MAHAVIR SURGICAL

Albee's type orthopaedic attachment



Telescopic type Orthopaedic Leg Extension Device



Steinmen Pin Holding Clamp



Radiolucent Operating Table with Stand



Femur Nailing Support



Tibia Nailing

Hanging Orthopedic Attachment



*Designing &
Defining Healthcare
Products*



MAHAVIR SURGICAL



Neuro Sujita Head Fixator for Sitting / Prone Positions



Head Rest device for prone, Spine & Lateral Position



Spinal Bridge for prone position



Neuro Skull Fixator Spine Position

STANDARD ACCESSORIES



Lithotomy Crutches



Lateral Support



Crutches Holder Steel Clamp



Shoulder Support



Arm Rest



Water Proof Antistatic Rubber Mattress

STANDARD ACCESSORIES

- Anesthetic screen with clamp
- Padded Arm Board with clamp
- Padded Side support with clamp
- Padded Shoulder support with clamp
- Lithotomy Crutches Goepel Type with Steel Clamp
- Handle for Kidney Bridge.
- Water Proof Antistatic Rubber Mattress 50 mm

OPTIONAL ATTACHMENTS

ORTHOPAEDIC SURGERY

1. Ortho. Leg Traction complete Attachment
2. Ortho. Hand Traction Device
3. Hip Nailing Support [inner thigh rest with pad]
4. Steinmein Pin Holding Clamp.
5. Tibia Nailing [L-Shaped Knee rest with pad]
6. Lower Limp Surgery Extention.
7. Four Post Frame for Spine and Survival Surgery/Spinal Frame
8. Radio-Translucent Hand Operating Table .

GYNEC & UROLOGY

1. Stainless Steel Drainage Tray with Waste pipe fitting.
2. Stainless Steel Transurethral Tray with Wire Mesh Screen and waste pipe fitting.

GUARANTEE

Every "Mahavir" Equipment is thoroughly tested by our qualified & experienced Engineers before despatch and carry a Guarantee of Free Repair/Replacement of any part of proven defective manufacture within one year from the date of supply.

Data and specifications given in this catalogue are approximate and for customers information only As our policy is one of continuous improvement, company reserve the right to modify designs without prior notice.

Image file on this catalogue is property of Mahavir Surgical

NEUROSURGERY

1. Mayfield 3 - Pin Retractor with Head [Prone & Sitting Position]
2. Sujita Head Clamp [Prone & Sitting Position / Head Fixator]
3. Spinal Bridge.
4. "M" Type Face Head Rest.
5. Neuro - Attachment for Sitting up Position Head Rest.
6. Neuro Attachment for Prone Position Head Rest.

RADIOLOGY

1. Radio Translucent Table Top Radiography [X-ray]
2. Cassette Holder with Carrier for A.P.Radiography.
3. Stainless-Steel Lateral Cassette Holder.



MAHAVIR SURGICAL

Designing & Defining Healthcare Products

HOSPITAL FURNITURE, EQUIPMENTS, INSTRUMENTS & SUNDRIES

207, Bombay Talkies Compound, Malad (W), Mumbai - 400 064.

Tel. : 2882 3677, 2882 6982 • Fax : +91 -22- 2882 6983

Email : m1surgical@yahoo.co.in / info@mahavirsurgical.com

Mob.: 99670 22224 / 98202 29137 | Web: www.mahavirsurgical.com